

Virtuoso® DX2


auxiliary submasters panel



The Virtuoso® DX2 Auxiliary Submasters panel from Production Resource Group works in conjunction with the Virtuoso DX2 control console to provide additional dedicated controls for event playback. The Auxiliary Submasters panel provides 20 faders and associated action buttons, which allow direct access to all 30 Virtuoso submasters without paging. For shows requiring critical playback control or fast-paced intensity level adjustments, the Auxiliary Submasters panel is the ideal addition to the Virtuoso DX2 control system.

Each submaster includes all the DX2 controls for cue and effect activation, including Load, Go, Back, Run and Stop/Step. LED indicators provide button status where applicable, while an on-board display includes active and pending cue or effect, submaster attributes and completion times. The Auxiliary panel supports all Virtuoso submaster mode/attribute functions, which can be applied using the built-in Choose key.

The Auxiliary panel features electroluminescent displays, which provide a wide viewing angle for superior readability in any lighting condition. Two retractable height adjustment levers allow the panel to be positioned flat or at an angle matching the DX2 console. In addition, a gooseneck lamp is provided to illuminate the panel independently from the associated console. A single FireWire® connector provides console data connection.

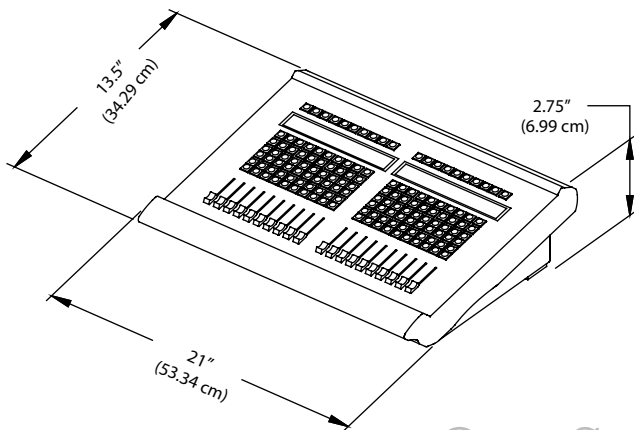

Description

Features:	<ul style="list-style-type: none"> 20 submaster faders and associated action buttons Wide-angle electroluminescent displays Adjustable height positioning levers FireWire® serial bus data connection Gooseneck lamp
Controls:	<ul style="list-style-type: none"> 20 submasters with Load, Go, Back, Run and Stop/Step controls for cue and effect activation On-board submaster display including active and pending cue or effect, submaster attributes and completion times Choose key for application of all submaster modes and attributes from the DX2 console panel
Weight:	14.8 lbs (6.71 kg)
Dimensions:	21 x 13.5 x 2.75 in. (53.34 x 34.29 x 6.99 cm)
Requirements:	Virtuoso® DX2 control console
Power:	12VAC / 1.5A (provided by the host console)
Includes:	<ul style="list-style-type: none"> Littlite® gooseneck lamp Data and power cables Dust cover

One Source. Unlimited Resources.™



www.prg.com

Chicago (Des Plaines) 847-227-5171 | Chicago (Palatine) 847-705-3885 | Dallas 214-630-1963 | Detroit 248-526-5290 | Las Vegas 702-942-4774
 London 44-208-575-6666 | Los Angeles 818-252-2600 | Mount Vernon 914-662-3540 | Nashville 615-834-3190 | New Windsor 845-567-5700
 New York 212-589-5400 | North Bergen 201-758-4000 | Orlando 407-855-8060 | Tokyo 81-3-5665-3377 | Toronto 905-270-9050

Virtuoso® is a registered trademark of Production Resource Group, LLC.
 FireWire® is a registered trademark of Apple Computer, Inc. Littlite® is a registered trademark of CAE, Inc.
 ©2007 Production Resource Group, LLC. All Rights Reserved. Specifications are subject to change without notice. Version: October 2007