



Hybrid

LED panel for indoor/outdoor

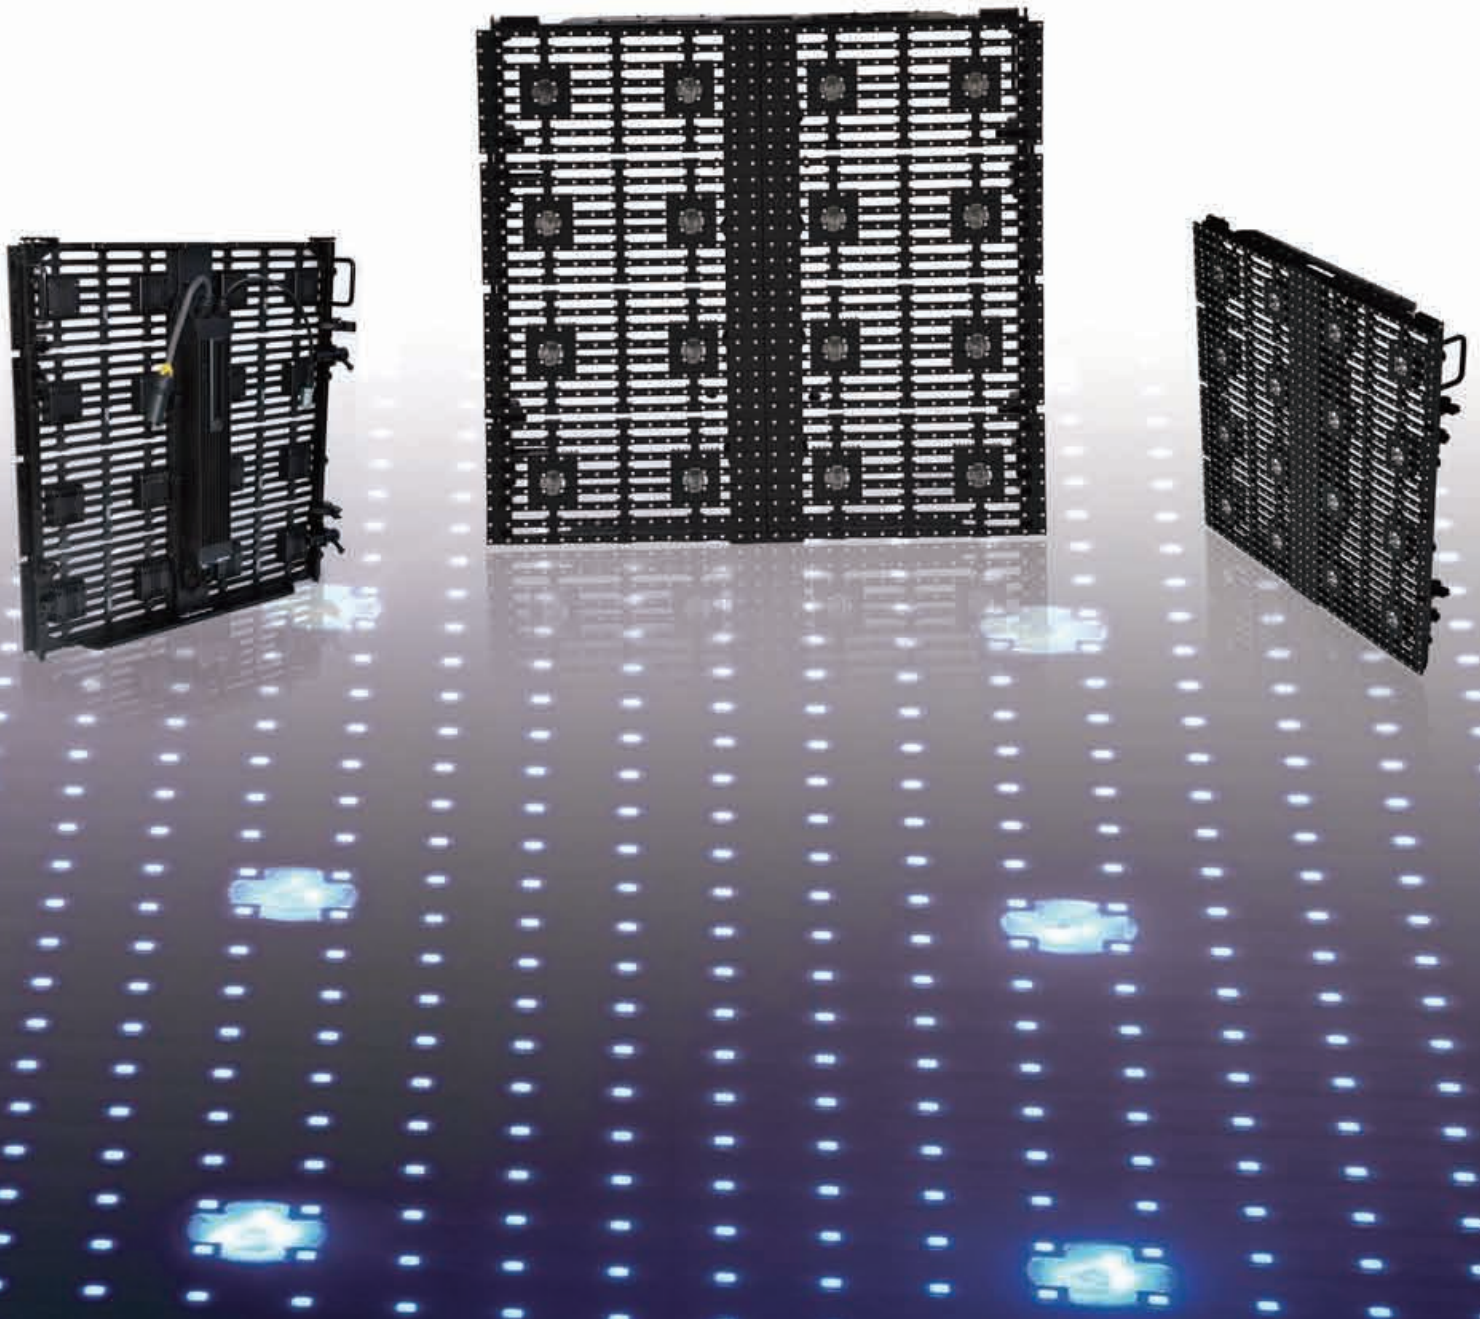

Features





More than LED display

Integrated with LED spotlight,
Hybrid has multiple functions,
lighting combined with video.

Exclusive revolutionary product

The product never appeared before.
Let's create a revolutionary stage together again.

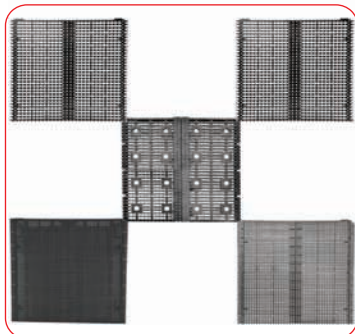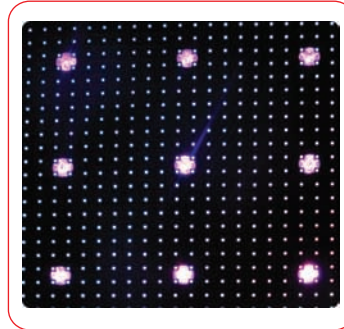


Compatible frame structure

All MC series and Hybrid-18 share the same frame
structure to enable easy mix and match.

Exclusive design for a hollow sculpt

Using an attached frame
it was never so easy to make a hollow sculpt.

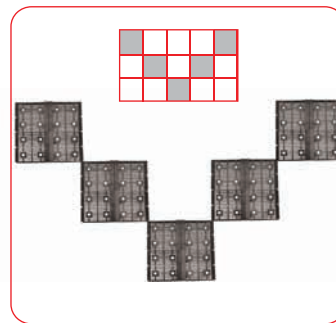

Easy installation

By using magnets,
assembling has never been so easy
and can be handled by a single person.

Applications



Specification

	LED Display	LED Spotlight
Pixel Pitch	18.75mm	150.0mm
LED Type	3in1 SMD	highpower LED
Brightness(Nit or CD/m ²)	3000 cd/m ² (Cree 3435) 3200 cd/m ² (NationStar 3535)	77LM RGB
Transparency	30%	30%
Module Size(mm) W×H×D	600.0×600.0×82.0	600.0×600.0×82.0
Module Area	0.36m ²	0.36m ²
Pixels/Module	32 × 32	4 × 4
Pixels/m ²	2844	44
Viewing Horizontal/Vertical	160°	20° / 8°
Weight/Module	8.60kg/18.96lbs	8.60kg/18.96lbs
IP (Front/Reverse)	IP65	IP65
Color Depth	16bit	14bit
Scan	Static	Static
Refresh Rate	4000Hz	2000Hz
Max Power/Module	110W	70W
Certificates	TUV/CE	TUV/CE
Working Temperature	-20 to 45°C	-20 to 45°C