




PIXLED F-12

OUTDOOR MODULAR, INDOOR MODULAR



Pixled F-12 is a lightweight, and semi transparent LED screen. It offers wide viewing angles and excellent image integrity and color uniformity. F-12 is very flexible, packaged in Tait Technologies touring frames, it has a high refresh rate, and offers a cost-effective total display solution for both indoor and outdoor use.

Pixled F-12 can also be used with the MC-T touring frame.

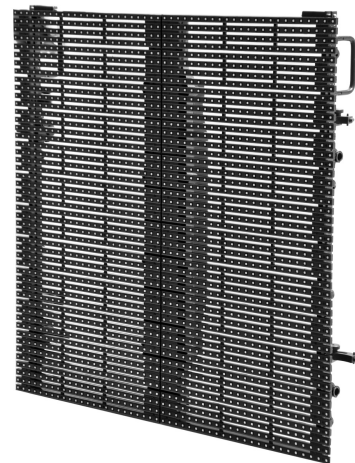

Technical details

Pixel/Effective Pitch	12.5 mm
Resolution	48 x 48
Weight per tile	10.4 kg/tile
Weight per m2	28.89 kg/m2
Module size - mm	600 x 600 x 87
Module size - inch	23.62 x 23.62 x 3.43
Brightness	4500 Nit
Viewing Angle	120° H x 120° V
Power consumption max	180 W/tile
Transparency %	21
IP Rating	IP65
Usage	Indoor / Outdoor
Data Connection	Cat 5
Processing	Colorlight
Refresh Rate	4000 Hz
Input frequency	50-60 Hz
Input signal	DVI up to 1920 x 1080
Build time	

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400, Fax: +44 (0)1442 849 401