




PIXLED F-15 V1

TRANSPARENT LED, OUTDOOR MODULAR



PIXLED F -15 V1 is a lightweight, semi-transparent LED video display, suitable for both indoor and outdoor applications. With its 15.6mm pixel pitch, 6000 NIT light output and rugged IP65 rating, the F15 is the ideal solution for applications with relatively long viewing distances.

*please note PIXLED F-15 V1 cannot be combined with Pixled F-15 V2.

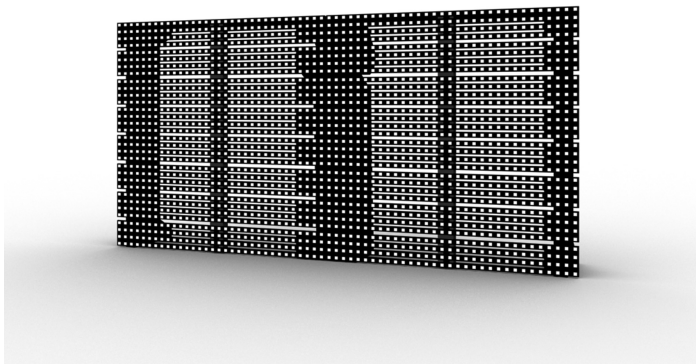

Technical details

Pixel/Effective Pitch	15.625 mm
Resolution	64 x 32
Weight per tile	15.9 kg/tile
Weight per m2	31.8 kg/m2
Module size - mm	1000 x 500 x 187
Module size - inch	39.37 x 19.69 x 7.36
Brightness	6000 Nit
Viewing Angle	145° H x 145° V
Power consumption max	350 W/tile
Transparency %	5.2
IP Rating	IP65
Usage	Indoor / Outdoor
Data Connection	Cat 5
Processing	Barae
Refresh Rate	450/480 Hz
Input frequency	50-60 Hz
Input signal	DVI 1280 x 1024
Build time	n/a

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400, Fax: +44 (0)1442 849 401