




# PIXLED F-15 V2

TRANSPARENT LED, OUTDOOR MODULAR



PIXLED F-15 V2 is a lightweight, semi-transparent LED video display, suitable for both indoor and outdoor applications. With its 15.6mm pixel pitch, 5500 NIT light output and rugged IP65 rating, the F15 is the ideal solution for applications with relatively long viewing distances.

\*please note PIXLED F-15 V2 cannot be combined with Pixled F-15 V1 due to technical differences.

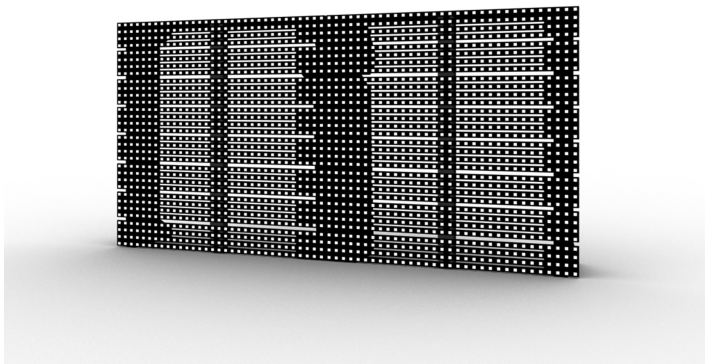

# Technical details

<b>Pixel/Effective Pitch</b>	15.625 mm
<b>Resolution</b>	64 x 32
<b>Weight per tile</b>	16.1 kg/tile
<b>Weight per m2</b>	32.2 kg/m2
<b>Module size - mm</b>	1000 x 500 x 109.7
<b>Module size - inch</b>	39.37 x 19.69 x 4.32
<b>Brightness</b>	5000 Nit
<b>Viewing Angle</b>	140° H x 140° V
<b>Power consumption max</b>	425 W/tile
<b>Transparency %</b>	5.2
<b>IP Rating</b>	IP65 (front) / IP 54 (rear)
<b>Usage</b>	Indoor / Outdoor
<b>Data Connection</b>	Cat 5
<b>Processing</b>	Linsn
<b>Refresh Rate</b>	450/480 Hz
<b>Input frequency</b>	50-60 Hz
<b>Input signal</b>	DVI 1280 x 1024
<b>Build time</b>	n/a

## **XL VIDEO LTD**

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400

## **PRODUCTION RESOURCE GROUP UK LTD**

Unit 2, The Cofton Centre, Groveley Lane, Birmingham, B31 4PT

Tel: +44 (0)845 470 6400