



PIXLED F-30 FLOOR PANELS

CREATIVE LED




This unique design allows to standard F-30 module to be converted into a rugged and versatile floor module, without compromising on serviceability or screen uniformity. The surface is formed from a special transparent PLEXI material.

The standard F-30 has no separate control boxes, meaning easy tile to tile connections and allows for large surfaces to be created/built quickly and simply.

The F-30 is waterproof, therefore there is no risk of damage due to water or humidity penetrating the floor.

This separate floor module allows our rental customers a wider range of usage than the standard PIXLED F-30 panel.

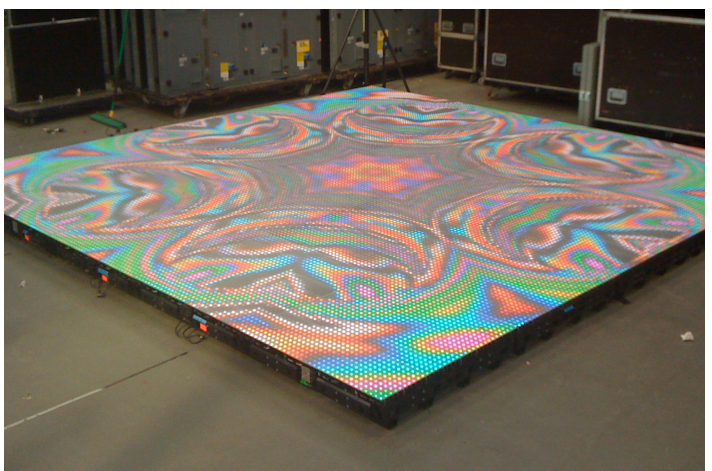

Technical details

Pixel/Effective Pitch	30 mm
Resolution	32 x 32
Weight per tile	n/a
Weight per m2	n/a
Module size - mm	960 x 960 x 200
Module size - inch	37.795 x 37.795 x 7.874
Brightness	2000 Nit
Viewing Angle	120° H x 120° V
Power consumption max	280 W/tile
Transparency %	50
IP Rating	IP65
Usage	Indoor / Outdoor
Data Connection	BNC
Processing	Kindwin
Refresh Rate	1000 Hz
Input frequency	60 Hz
Input signal	DVI 1280 x 1024
Build time	n/a

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400

PRODUCTION RESOURCE GROUP UK LTD

Unit 2, The Cofton Centre, Groveley Lane, Birmingham, B31 4PT

Tel: +44 (0)845 470 6400