




PIXLED F-30

TRANSPARENT LED



PIXLED F-30 is a lightweight, semi-transparent LED video display, suitable for both indoor and outdoor applications. With its 30mm pixel pitch, 2000 NIT light output and rugged IP65 rating, the F-30 is the ideal solution for applications with relatively long viewing distances.

PIXLED F-30 has 2 versions V1 is for indoor use only, V2 is suitable for indoor and outdoor use. To discuss using Pixled F-30 for your show, please contact one of our team!

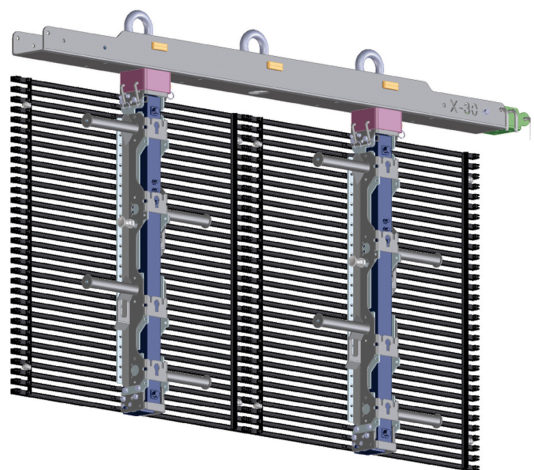

Technical details

Pixel/Effective Pitch	30 mm
Resolution	32 x 32
Weight per tile	20.7 kg/tile
Weight per m2	22.46 kg/m2
Module size - mm	960 x 960 x 134
Module size - inch	37.8 x 37.8 x 5.28
Brightness	2000 Nit
Viewing Angle	120° H x 120° V
Power consumption max	280 W/tile
Transparency %	50
IP Rating	IP65
Usage	Indoor
Data Connection	BNC
Processing	Kindwin
Refresh Rate	1000 Hz
Input frequency	60 Hz
Input signal	DVI 1280x1024
Build time	n/a

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400

PRODUCTION RESOURCE GROUP UK LTD

Unit 2, The Cofton Centre, Groveley Lane, Birmingham, B31 4PT

Tel: +44 (0)845 470 6400