




PIXLED F-6

INDOOR MODULAR



The PIXLED F-6 LED display has a 4000 Nit light output and uses Black SMDs to offer outstanding contrast, deep black levels, and excellent brightness.

PIXLED F-6 can also be used to create curved displays, thanks to its integrated locking mechanic.

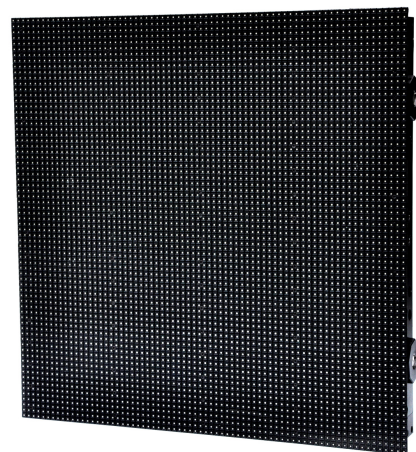

Technical details

Pixel/Effective Pitch	6.944 mm
Resolution	72 x 72
Weight per tile	10.7 kg/tile
Weight per m2	42.8 kg/m2
Module size - mm	500 x 500 x 104
Module size - inch	19.69 x 19.69 x 4.09
Brightness	4000 Nit
Viewing Angle	145° H x 145° V
Power consumption max	450 W/tile
Transparency %	
IP Rating	IP40 (front) / IP20 (rear)
Usage	Indoor
Data Connection	BNC
Processing	Mitsubishi
Refresh Rate	800-960 Hz
Input frequency	50-60 Hz
Input signal	DVI/HDSDI up to 1920 x 1080
Build time	

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK

Tel: +44 (0)1442 849 400

PRODUCTION RESOURCE GROUP UK LTD

Unit 2, The Cofton Centre, Groveley Lane, Birmingham, B31 4PT

Tel: +44 (0)845 470 6400