


PIXLED FX-11

INDOOR MODULAR



The semi transparent construction of Pixled FX-11 allows for fanless cooling, and therefore makes this a silent product. This lack of noise makes Pixled FX-11 an ideal LED for use at meetings, corporate events, in the theatre, and in other locations where noise is a consideration.

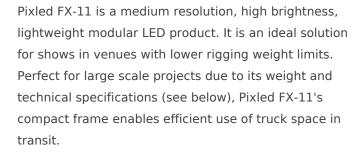







Technical details

Pixel/Effective Pitch	11.25 mm
Resolution	40 x 40
Weight per tile	4.6 kg/tile
Weight per m2	22.72 kg/m2
Module size - mm	450 x 450 x 80
Module size - inch	17.72 x 17.72 x 3.15
Brightness	5000 Nit (after calibration)
Viewing Angle	145° H x 145° V
Power consumption max	260 W/tile
Transparency %	36
IP Rating	IP 54
Usage	Indoor
Data Connection	BNC
Processing	Basic Tech
Refresh Rate	300 Hz
Input frequency	50-60 Hz
Input signal	DVI Up to 1920 x 1080
Build time	

XL VIDEO LTD

Unit 2 Eastman Way, Hemel Hempstead, Herts. HP2 7DU, UK
Tel: +44 (0)1442 849 400

PRODUCTION RESOURCE GROUP UK LTD

Unit 2, The Cofton Centre, Groveley Lane, Birmingham, B31 4PT Tel: +44 (0)845 470 6400