

## Unilumin 3 LED Video Module

The Unilumin 3 LED Video module, is a high-resolution modular video screen designed for interior applications. With a 3.9mm pixel pitch, it's perfect for those creative applications where a superior, high-resolution image with fine detail is desired. The Unilumin 3 is designed for applications requiring fast-deployment in flexible configurations. It is an ideal video solution for all markets including corporate events, live events, television and theatrical applications. The Unilumin 3 provides very wide viewing angles, allowing for use in an extensive range of venues and seating configurations.

The Unilumin 3 module has a slim, light weight design with its die-cast aluminum casing that features cabinet connectors for tool-free installation. The panels are designed for seamless mounting to reduce noticeable lines. Its lighter weight design reduces the weight for the overall rig as well as the truck pack. Its modular design makes the product lighter and easier to hang in more configurations as well as making it easier to quickly service in the field.



### Features

- **ULTRA SLIM AND LIGHT WEIGHT**
- **SEAMLESS DESIGN WITH DIE-CAST ALUMINUM CASING**
- **500mm x 500mm STANDARD MODULE SIZE, EASY TO CALCULATE TOTAL AREA**
- **EASY TO TRANSPORT; QUICK TO INSTALL OR DISMOUNT**
- **TRUE BLACK SMD WITH WIDE VIEWING ANGLE**
- **5,000:1 CONTRAST RATIO**
- **CABINET CONNECTION DESIGN FACILITATES TOOL-FREE INSTALLATION**

### Specifications

<b>PIXEL PITCH (TRUE PITCH):</b>	<b>3.9mm</b>
<b>PIXEL DENSITY:</b>	<b>65,536 PIXELS/m<sup>2</sup></b>
<b>BRIGHTNESS:</b>	<b>1,200 NITS (Cd/m<sup>2</sup>)</b>
<b>MODULE RESOLUTION:</b>	<b>128 X 128 PIXELS</b>
<b>LED ENCAPSULATIONS:</b>	<b>SMD2121</b>
<b>OPERATING TEMPERATURE:</b>	<b>0° C to +45 C</b>
<b>OPTIMUM VIEWING ANGLE:</b>	<b>H: 120 V:100°</b>
<b>MODULE SIZE (in/mm) W x H x D:</b>	<b>500mm X 500mm</b>
<b>MODULE POWER:</b>	<b>1 AMP @ 120V / .75 AMP @ 208V</b>
<b>MODULE WEIGHT:</b>	<b>18.74 LBS (8.5KG)</b>
<b>IP RATING:</b>	<b>IP30</b>
<b>REFRESH RATE:</b>	<b>&gt;4,000Hz</b>
<b>GRAY LEVEL:</b>	<b>14 BIT</b>

### Rear View




# Unilumin UT 3.9 LED Video Module

## Other Views



## Dimensions

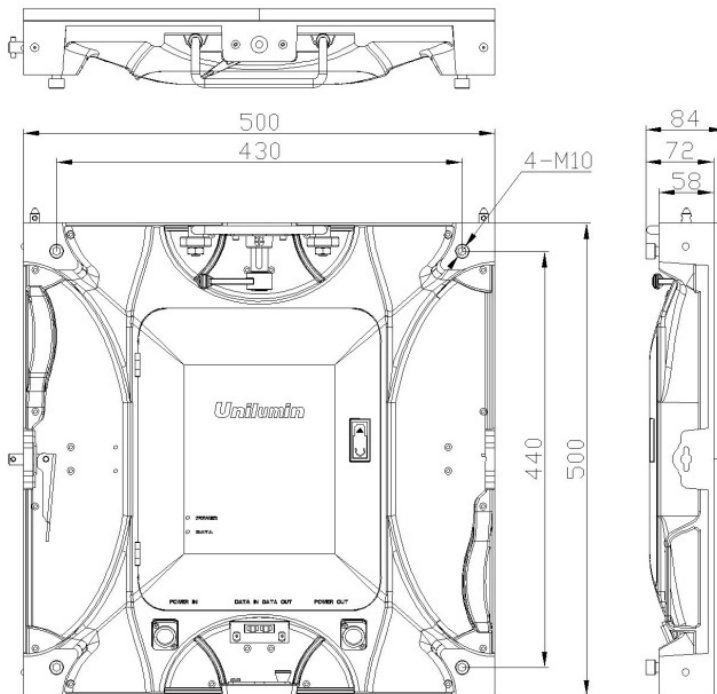

[WWW.PRG.COM](http://WWW.PRG.COM)

©2015 PRODUCTION RESOURCE GROUP, LLC. ALL RIGHTS RESERVED. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. VERSION: FEBRUARY 2015

**WIDTH:**  
19.68 in (500 mm)

**HEIGHT:**  
19.68 in (500 mm)

**DEPTH:**  
3.30 in (84 mm)

**WEIGHT:**  
18.74 lbs (8.5 kg)