




# PRG Winches

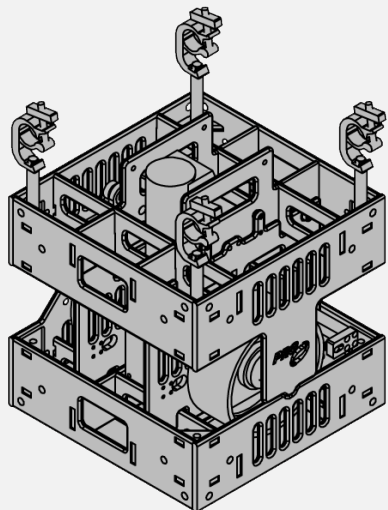


**Model SCS-325-60**

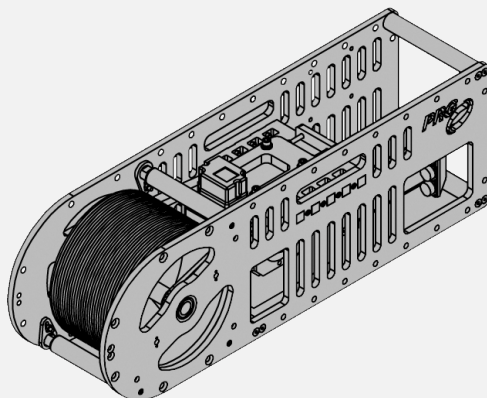

**Model SCS-325-71**

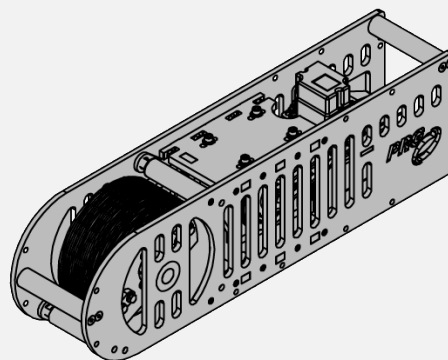

**Model SCS-100/75-55**

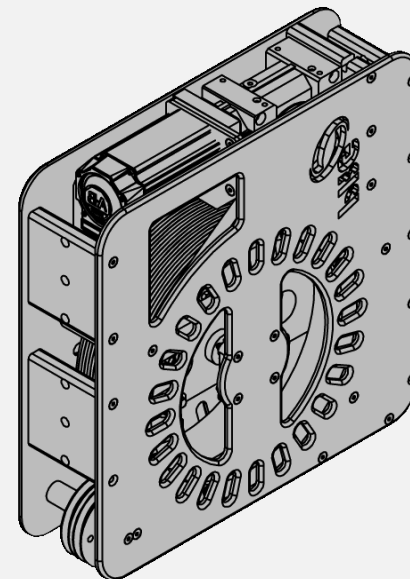

**Model SCS-240-70**

## Winches

Model	Max Load Speed	Max Continuous Load Line Pull	Max Load Travel	Dimensions	Weight	Ecode
SCS-325-60	2.4fps (0.73mps)	325lbs (148kgs)	60ft (18m)	L21.25" x W21.25" x H24.59"	240lbs (109kg) *300lbs (136kg)	2.97011
SCS-230-71	6.1fps (1.9mps)	230lbs (105kgs)	71ft (21.6m)	L36" x W9.5" x H12"	153lbs (70kg)	2.97010
SCS-100/75-55	6fps (1.7mps)	100lbs (45kg) Horizontal 75 lbs (34kg) Vertical	55ft (17m)	L30" (36.75" w/ J-box) x W6.25" x H9"	77lbs (35kg)	2.97013
SCS-240-70	5fps (1.5mps)	240lbs (109kg)	70ft (21.3m)	L24" x W6.25" x H24"	110lbs (50kg)	2.9702D

\*With secondary brake option

# PRG Winches



Model WAHL-0002




Model WAHL-0003

## Winches

Model	Max Load Speed	Max Continuous Load Line Pull	Max Load Travel	Dimensions	Weight	Ecode
WAHL-0002	2"-22"/sec	11lbs (5kg)	33ft (10m)	L9.5" x W8.3"x H5.19"	11.5lbs (5.2kg)	
WAHL-0003	2"-12"/sec	22lbs (10kg)	33ft (10m)	L9.5" x W8.3"x H5.19"	11.5lbs (5.2kg)	

# PRG Winches

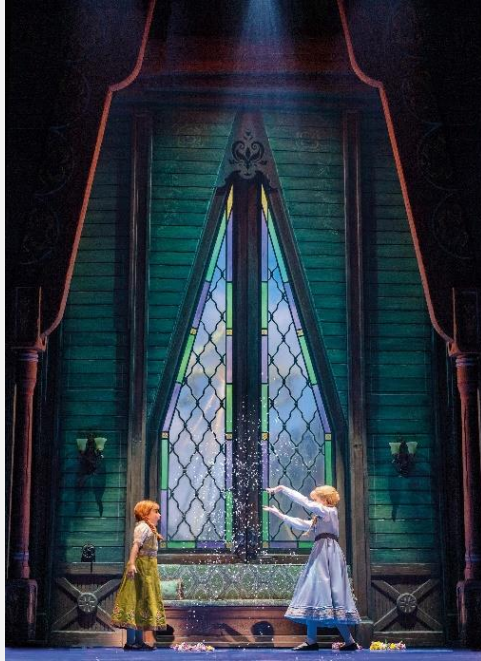

*Frozen – First National Tour – 2019  
PRG's PTO Winches – Arendelle Windows*

PRG's Winches are available in a wide variety of models, from dead haul to counterweight assist, and more. PRG's versatile and powerful Winches are well suited for any entertainment production and are ideal for all markets including concert touring, corporate events, television and theatre.

PRG's SCS Winches are suitable for any entertainment production, corporate event or installation application. All are designed to be powerful yet compact, offering a versatile selection of dependable winches that can be incorporated into a broad range of scenic and production elements. All PRG SCS Winches are designed for seamless integration into the Stage Command® System. SCS Winches provide speed and power (including full torque at zero speed), along with precision for positioning scenic, lighting and rigging effects safely and creatively. Each winch has a primary optical encoder, used by the Commander console system, which accurately converts the winch shaft rotation into fine control of speed and positioning. SCS Winches deliver exact repeatable positioning, smooth bi-directional motion and variable speed with programmable acceleration and deceleration. The complete line of SCS Winches has been engineered to be unsurpassed in reliability and safety.

## Features

- Suitable for a wide variety of applications
- Powerful and compact
- Versatile and dependable
- Able to deliver exact, repeatable positioning, smooth bi-directional motion and variable speed.

© 2020 PRODUCTION RESOURCE GROUP, LLC. ALL RIGHTS RESERVED.  
SPECIFICATIONS ARE SUBJECT TO CHANGE  
WWW.PRG.COM